LS-1 Series Slide

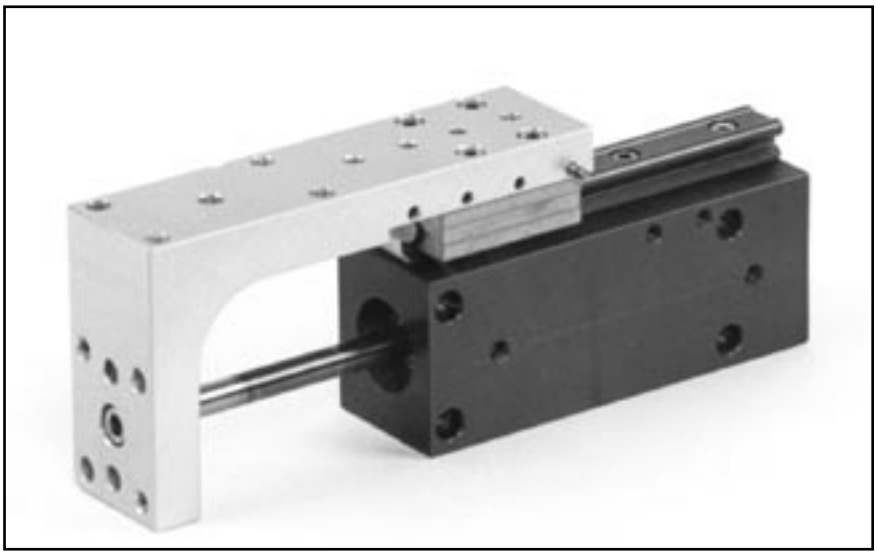

Dimensions

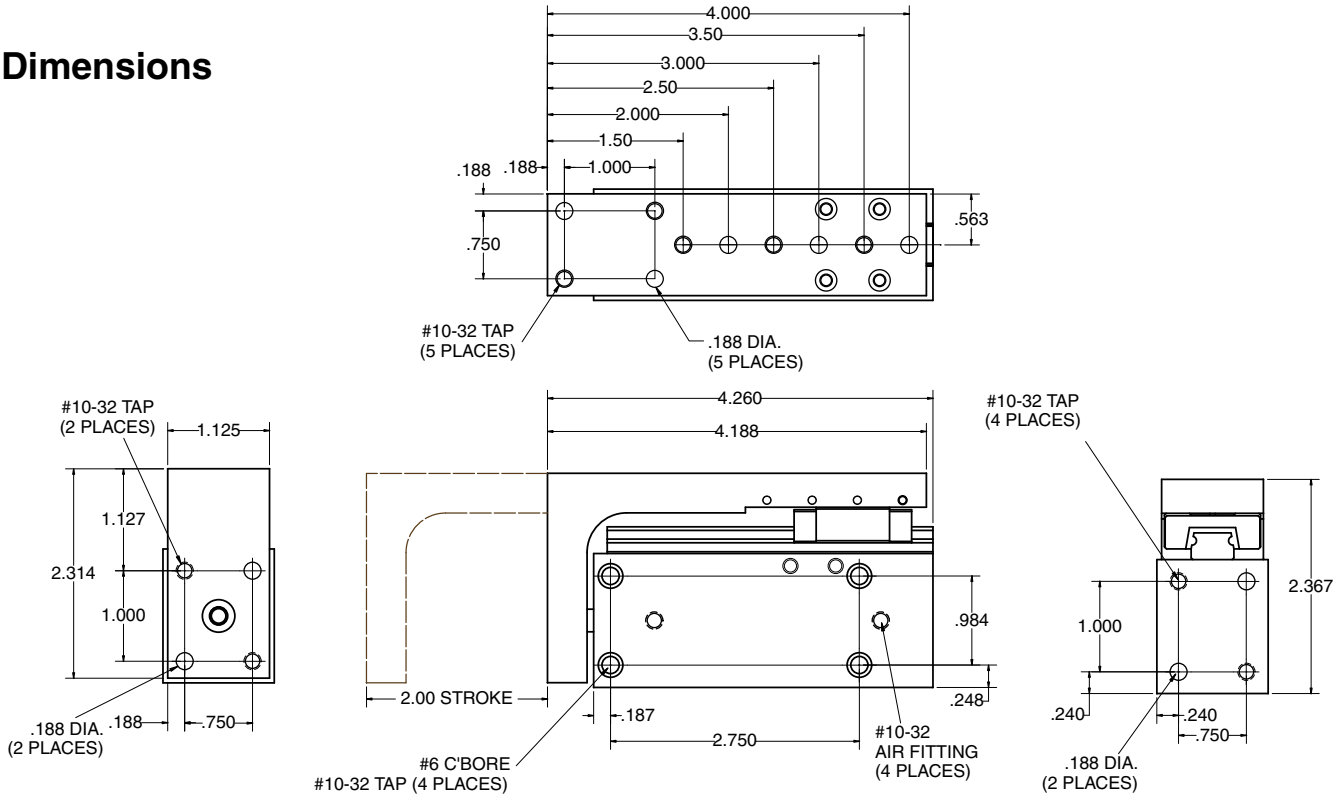

Technical Data

- Force @ 80 PSI = 32 lbs.
- .75” Dia. Bore
- Available strokes - 1”, 1-1/2“, 2”
- Air Connection = 10-32
- Air Supply: 60-100 PSI (4-7 Bar)
- Maximum Recommended Load F1 for horizontal applications = 10 lbs.
- Maximum Recommended Load F2 for vertical applications = 12 lbs.
- Life expectancy for bearing wear at moderate cycles = 100 million travel inches

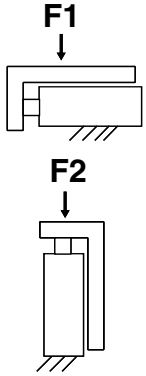

780 E. Tek Drive Crystal Lake, IL 60014 Telephone 815/477-1400 FAX 815/477-9818
web: www.barringtonautomation.com e-mail:info@barringtonautomation.com